


BUTYLEN-ET100

Product information

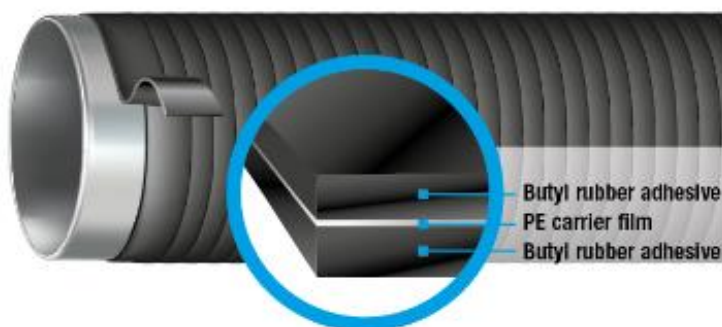

Special advantages:

-  For temperatures up to +100°C (+212°F).
-  No pre-heating of the pipe surface required.
-  Highly adaptable butyl rubber tape.
-  Fuses in the overlapping area to form a hose-like wrap.
-  Compatible with factory coatings made from PE, PP, FBE, PU, CTE and bitumen.

3-ply butyl rubber tape with thermally-stable butyl rubber coating on both sides and an overstretch prevention layer made from a stabilized polyethylene film.

DEKOTEC GmbH stands for experience, quality and reliability in the field of corrosion prevention and sealing technology. The success is based on the development of the Petrolatum-Tape which was already developed in 1927 as the first product worldwide for passive corrosion prevention of pipelines. We establish and guarantee the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees are continuously implementing safe and individual solutions in a personal cooperation with the customer.

Description

BUTYLEN-ET100 is a cold-applied 3-ply corrosion protection tape with butyl rubber adhesive on both sides and an overstretch prevention layer made from stabilized polyethylene film.

The 3-layer construction means that BUTYLEN-ET100 fuses in the overlapping area to form a hose-like, leak-proof wrap, which is

effectively impermeable to water vapor and oxygen.

The special formulation of the butyl rubber adhesive gives BUTYLEN-ET100 an exceptional thermal stability rating of up to +100 °C (+212 °F).

BUTYLEN-ET100 is compatible with factory coatings made from PE, PP, FBE, PU, CTE and bitumen.

BUTYLEN-ET100 is used as a corrosion protection inner tape in the tape system **BUTYLEN-ET100/-R20 HT**, which has received certification for the stress class B 70 to EN 12068 and DIN 30672 by Enagas (Spain).

BUTYLEN-ET100 can be processed efficiently with **DEKOMAT®** wrapping machines.

Typical product properties

Property	Unit	Typical value	Test method
Carrier film color	-	Clear	-
Butyl adhesive color (inner)	-	Black	-
Butyl adhesive color (outer)	-	Black	-
Tape thickness	mm	≥ 1.0	ISO 4591 ASTM D1000
Carrier film thickness (approx.)	mm	≥ 0.025	
Inner adhesive layer thickness (approx.)	mm	≥ 0.5	
Outer adhesive layer thickness (approx.)	mm	≥ 0.5	
Elongation at break	%	≥ 200	DIN 30672
Tensile strength	+23°C (+73°F) N/cm	≥ 10	EN 12068
Dielectric strength	kV/mm	≥ 25	ASTM D149
Specific electrical resistance	Ω cm	≥ 10 ¹⁶	ASTM D257
Water absorption	+23°C (+73°F) 1 day/30 days %	≤ 0.1 / ≤ 0.4	DIN 53495 ASTM D570
Operating temperature	°C (°F)	-40 to +70 (-40 to +158)	-

BUTYLEN tapes can easily be applied by hand. Application is even more efficient with original **DEKOMAT®** wrapping machines. For **BUTYLEN** tapes with widths >50 mm, we recommend the deployment of a **DEKOMAT®** wrapping machine, to ensure that the final workmanship is of a superior and uniform quality.

Ordering information and packaging

	Core diameter (mm)	Roll length (m)	Roll width (mm)	Box contents			Weight per box (kg) (approx.)
				Number of rolls	Total tape length (m)	Tape area (m²)	
BUTYLEN-ET100	41	12.5	30	18	225	6.75	9.0
			50	12	150	7.5	10.0
			100	6	75	7.5	10.0
			150	6	75	11.25	15

Other lengths and widths are available on request.

Storage

When stored in its original, unopened packaging, **BUTYLEN-ET100** can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +50°C (+122°F)

Store in a dry location and do not rest anything against the front of the product.



Specialized Coating Systems (Pty) Ltd

2 Jones Rd, Bartlett AH, Boksburg, Gauteng, South Africa
Tel: 086 137 2468 | Email: sales@speccoats.co.za
www.speccoats.co.za

DEKOTEC GmbH

P.O. Box 150120 | 51344 Leverkusen | Germany
Phone: +49 214 2602-0
www.dekotec.com | info@dekotec.com

Our product information, our application recommendations and other product related documents are made for your convenience only. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. All information contained in this document is to be used as a guide and does not constitute a warranty of specification. The information contained in the document is subject to change without notice. For this reason, no liability can be accepted for inaccurate advice or any failure to provide advice.

The user is responsible for checking the applications of the product and verifying its suitability for the intended use. Our General Terms of Sale, which are available at www.dekotec.com, shall be decisive without any exception.

This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation of this product information, the German text of the respective German product information, which is available at www.denso-group.com, shall be decisive. The legal relationship shall be governed by German law.

06.2021