


BUTYLEN-S10/-090

Product information

SPECIALIZED
COATING SYSTEMS

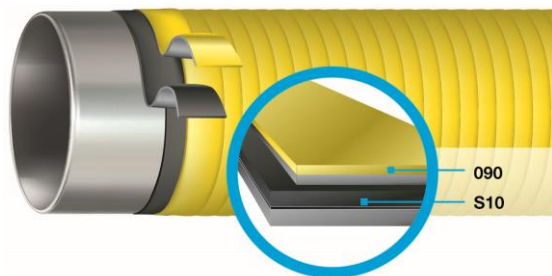

Special advantages:

- ✓ Approval by GRTgaz (FR) for stress classes R and HR (RV02).
- ✓ For operating temperatures up to +50°C (+122°F).
- ✓ Compatible with factory coatings made of PE, PP, PUR, FBE and bitumen.
- ✓ Two-tape system for flanges, T-pieces and other moulded parts.

Two-tape system for the field-joint coating of pipelines and pipeline components.

DEKOTEC GmbH stands for experience, quality and reliability in the field of corrosion prevention and sealing technology. The success is based on the development of the Petrolatum-Tape which was already developed in 1927 as the first product worldwide for passive corrosion prevention of pipelines. We establish and guarantee the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees are continuously implementing safe and individual solutions in a personal cooperation with the customer.

Description

BUTYLEN-S10/-090 is a tape system for the permanent corrosion prevention of pipelines and pipeline components.

The high flexibility and elasticity of **BUTYLEN-S10** and **BUTYLEN-090** permit a fast and safe application of the field-joint coating systems on the pipeline components, such as T-fittings and house connection valves.

Depending on the number of tape layers of the outside tape, the stress classes R or HR of GRTgaz are achieved. Based on the modular design, this **BUTYLEN** tape system can be used to establish the technically and economically

optimal system in accordance with the requirements of the construction project. **BUTYLEN-S10/-090** has an approval by GRTgaz (France) for stress class R and HR in accordance with the specifications RV02 (certificate No. 70).



BUTYLEN-S10 as an inside tape, fulfills essentially the corrosion prevention of the encasement system. **BUTYLEN-S10** features an especially adaptable carrier film and a symmetrical butyl rubber coating on both sides. The butyl rubber layers grow completely together in the overlapping area

and create a durable and hose-type coating.

BUTYLEN-090 is used as the outside tape in the encasement system and provides the mechanical protection for the inside tape. **BUTYLEN-090** is a flexible two-layer tape with a polyethylene outside layer and an inside butyl rubber coating, which amalgamates with the outside layer of the inside tape.

Both **BUTYLEN** tapes can be processed efficiently with the **DEKOMAT®** wrapping devices.

Typical product properties

Property	Unit	BUTYLEN-S10 Typical value	BUTYLEN-090 Typical value	Test method
Carrier film color	-	Black	Yellow	-
Butyl adhesive color inside	-	Gray	Gray	-
Butyl adhesive color outside	-	Black	-	-
Tape thickness	mm	≥0.8	≥0.4	ISO 4591 ASTM D1000
Carrier film thickness app.	mm	≥0.14	≥0.26	
Inside adhesive layer thickness app.	mm	≥0.38	≥0.14	
Outside adhesive layer thickness app.	mm	≥0.28	-	
Elongation at brea	%	≥500	≥400	DIN 30672
Tape strength	N / cm	≥40	≥35	EN 12068

Property		Unit	Typical value		Required value		Test method
Stress class		-	R	HR	R	HR	RV 02
System design	Primer		BUTYLEN-HT Primer		-	-	
	Inner tape		BUTYLEN-S10 2 layer 2 layer		-	-	-
	Outer tape		BUTYLEN-090 1 layer 2 layer		-	-	-
Total thickness		mm	≥2.0	≥2.4	-	-	-
Specific electrical insulation resistance		Ohm m ²	≥ 10 ¹⁰	≥ 10 ¹⁰	≥10 ⁸	≥10 ⁸	EN 12068
Peel strength on steel	+23°C (+73°F)	N / cm	≥20	≥20	≥15	≥15	EN 12068
	+50°C (+122°F)		≥3	≥3	≥2	≥2	
Peel strength layer to layer	S10 / S10	N / cm	≥25	≥25	-	-	EN 12068
	S10 / 090		≥10	≥10	-	-	
	090 / 090		≥2	≥2	-	-	
Indentation resistance (residual layer thickness)		mm	≥0.6 (1 MPa)	≥0.6 (10 MPa)	≥0.6 (1 MPa)	≥0.6 (10 MPa)	EN 12068
Impact resistance		J	≥10	≥15	≥10	≥15	GdF RV02
Cathodic disbondment resistance		mm	≤ 8	≤ 8	<15	<15	EN 12068
Lap shear strength (+23°C / +73°F)	on Steel	N / cm ²	≥15	≥15	-	-	EN 12068

BUTYLEN tapes can be easily applied manually. The processing with the original **DEKOMAT®** wrapping devices is even more efficient. For **BUTYLEN** tapes with widths of > 50 mm, we recommend the use of the **DEKOMAT®** wrapping device to guarantee an excellent processing quality.

Ordering information and packaging

	Core diameter (mm)	Width (mm)	Tape length (m)	Tape area (m ²)	Number of rolls	Content per box		
						Total tape area (m ²)	Total tape length (m)	App. weight (kg)
BUTYLEN-S10	41	30	15	0.45	18	8.1	270	9.7
		50	15	0.75	12	9	180	10.6
		100	15	1.5	6	9	90	10.5
BUTYLEN-090	41	30	30	0.9	18	16.2	540	9
		50	30	1.5	12	18	360	10
		100	30	3.0	6	18	180	10

Additional lengths and widths are available on request.

Storage

When stored in its original, unopened packaging, **BUTYLEN-S10/090** can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +50°C (+122°F)

Store in a dry location and do not rest anything against the front of the product.



Specialized Coating Systems (Pty) Ltd

2 Jones Rd, Bartlett AH, Boksburg, Gauteng, South Africa

Tel: 086 137 2468 | Email: sales@speccoats.co.za

www.speccoats.co.za

DEKOTEC GmbH

P.O. Box 150120 | 51344 Leverkusen | Germany

Phone: +49 214 2602-0

www.dekotec.com | info@dekotec.com

Our product information, our application recommendations and other product related documents are made for your convenience only. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. All information contained in this document is to be used as a guide and does not constitute a warranty of specification. The information contained in the document is subject to change without notice. For this reason, no liability can be accepted for inaccurate advice or any failure to provide advice.

The user is responsible for checking the applications of the product and verifying its suitability for the intended use. Our General Terms of Sale, which are available at www.dekotec.com, shall be decisive without any exception.

This is a translation from the original German product information. In case of any discrepancy or any dispute arising from the interpretation of this product information, the German text of the respective German product information, which is available at www.denso-group.com, shall be decisive. The legal relationship shall be governed by German law.

03.2019