


BUTYLEN-S10

Product information

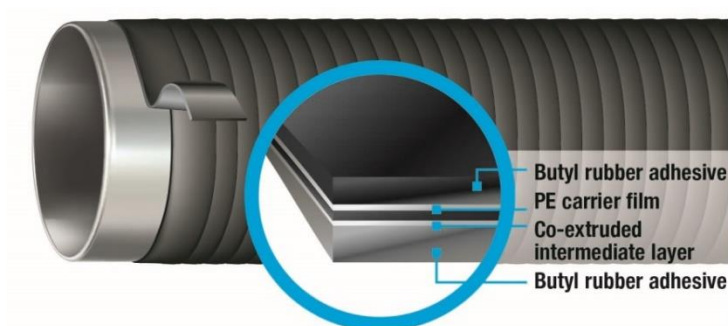

Special advantages:

- ✓ Co-extruded 3-ply tape with an especially adapting carrier film.
- ✓ Single tape system for flanges, T-fittings and other fittings.
- B50**
EN 12068 Fulfills EN 12068-B50 and DIN 30672-B50.
- ✓ Tested in accordance with ASTM.
- ✓ For operating temperatures up to +50 °C (+122°F).

Single tape system for the corrosion prevention coating of metal pipes, pipelines and containers in accordance with DIN 30672, EN 12068, ASTM and AWWA. For extreme corrosion conditions and mechanical stresses on uneven substrates.

DEKOTEC GmbH stands for experience, quality and reliability in the field of corrosion prevention and sealing technology. The success is based on the development of the Petrolatum-Tape which was already developed in 1927 as the first product worldwide for passive corrosion prevention of pipelines. We establish and guarantee the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees are continuously implementing safe and individual solutions in a personal cooperation with the customer.

Description

BUTYLEN-S10 is a cold applied single tape system for corrosion prevention of metal pipes, pipelines and fittings. It is especially suitable for uneven substrates and complicated geometries.

An especially adaptable carrier film makes it possible that BUTYLEN-S10 adapts perfectly to uneven surfaces and parts that are formed with a complicated shape.

Due to the innovative formula, the tapes grow completely together in the

overlapping area and create a long-lasting hose-type coating.

BUTYLEN-S10 is a system approved by DIN-DVGW (**B 50**) with an impact resistance that is equivalent to class C.

BUTYLEN-S10 is basically impermeable for water vapor and oxygen and it is resistant against soil bacteria and electrolytes.

BUTYLEN-S10 is compatible with factory coatings made of PE, PP, FBE, PU, CTE and Bitumen.


The system BUTYLEN-S10 consists of:

BUTYLEN-HT Primer

a solvent containing primer, which provides an optimal adhesion of the **BUTYLEN** tapes with the substrate.

Please refer to the separate product information of the BUTYLEN-HT Primer.

BUTYLEN-S10, a co-extruded 3-ply plastic tape made from stabilized polyethylene carrier materials with butyl rubber adhesive on both sides.

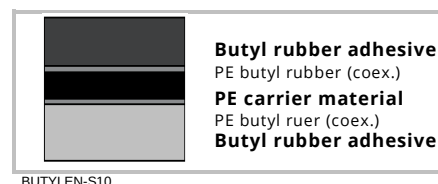

Typical product properties

Property	Unit	Typical value	Test method
Carrier film color	-	black	-
Butyl adhesive color inside	-	grey	-
Butyl adhesive color outside	-	black	-
Total thickness	mm	≥0.8	ISO 4591 ASTM D1000
Carrier film thickness app.	mm	≥0.14	
Inside adhesive layer thickness app.	mm	≥0.38	
Outside adhesive layer thickness app.	mm	≥0.28	
Elongation at break	%	≥250	DIN 30672
Tape strength	+23°C (+73°F) N/cm	≥40	EN 12068
Dielectric strength	kV/mm	≥10	DIN 53481
Water absorption	+23°C (+73°F) 1 day / 30 days %	≤0.1 / ≤0.4	DIN 53495 ASTM D570
Brittleness temperature	°C	-46±4 (-50.8±7.2)	DIN 53372
		-58±4 (-72.4±7.2)	GOST 10354

BUTYLEN-S10 (4 layers) with BUTYLEN-HT Primer

Property	Unit	Typical value	Required value	Test method
Systems building	Primer	BUTYLEN-HT		
	Tape	BUTYLEN-S10, 4 layers		
Specific electrical insulation resistance	Ohm m ²	≥ 10 ¹⁰	≥ 10 ⁸	EN 12068
Contact resistance	Ohm cm	≥ 10 ¹⁵	-	DIN 53482 ASTM D257
Peel resistance metal / primer / S10	N/cm	+23°C (+73°F) ≥ 20	+50°C (+122°F) ≥ 3	EN 12068
		≥ 35	≥ 5	
Peel resistance layer to layer	N/cm	+23°C (+73°F) ≥25	+50°C (+122°F) ≥3	EN 12068
S10 / S10			≥ 8 ≥ 2	
Indentation resistance - residual layer thickness	+50°C (+122°F), 1MPa mm	≥ 0.8	> 0.6	EN 12068
Impact resistance (four-layer)	J	≥ 15 (fulfills class C)	≥ 10	EN 12068
Cathodic disbondment resistance	mm	≤ 8	-	ASTM G8
Lap shear strength +23°C (+73°F)	on steel	≥15	5	
	on PE	≥15	5	

BUTYLEN tapes can be easily applied manually. The processing with the original **DEKOMAT®** wrapping devices is even more efficient. For **BUTYLEN** tapes with widths of > 50 mm, we recommend the use of the **DEKOMAT®** wrapping device to guarantee an excellent processing quality.

Ordering information and packaging

	Core diameter (mm)	Width (mm)	Tape length (m)	Tape area (m ²)	Content per box			
					Number of rolls	Total tape area (m ²)	Total tape length (m)	App. Weight (kg)
BUTYLEN-S10	41	30	15	0,45	18	8,1	270	9,7
		50	15	0,75	12	9	180	10,6
		100	15	1,5	6	9	90	10,5

Additional lengths and widths are available on request.

Storage

When stored in its original, unopened packaging, **BUTYLEN-S10** can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +50°C (+122°F)

Store in a dry location and do not rest anything against the front of the product.



Specialized Coating Systems (Pty) Ltd

2 Jones Rd, Bartlett AH, Boksburg, Gauteng, South Africa

Tel: 086 137 2468

Email: sales@speccoats.co.za

www.speccoats.co.za

DEKOTEC GmbH

Felderstrasse 24 | 51371 Leverkusen | Germany

Phone: +49 214 2602-0 | info@dekotec.com

www.dekotec.com

Our product information, application recommendations and other printed publications provide advice to the best of our knowledge and indicate our level of knowledge at the time of printing. The content is not legally binding. Therefore, no liability is assumed for incorrect and missing advice. The applicator is obliged to check the suitability and possibility of application for the intended purpose. Unless otherwise specified, all of the brands named are trademarks, at least registered in Germany, which are protected by law.

Only our general terms and conditions of sale, which you will find at www.dekotec.com, apply. This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation, the German text of the respective German product information, shall be decisive. The legal relationship shall be governed by German law.

06.2020