

BUTYLEN System 1


BUTYLEN-E12/-090/-R20 HT

Product information



SPECIALIZED
COATING SYSTEMS

Special advantages:

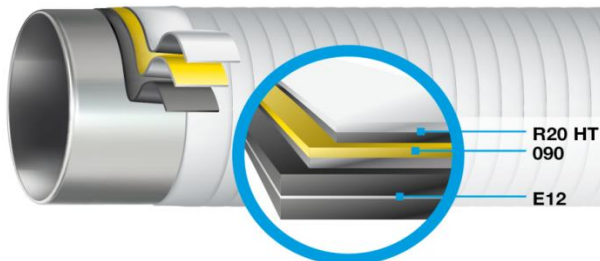

For permanent operating temperatures up to +30°C (+86°F).



Fulfills EN 12068-C 30.



Highly resistant thanks to three-tape design.



Easy application even for manual wrapping.

Robust field coating system for the corrosion prevention of pipelines and pipeline components.

DEKOTEC GmbH stands for experience, quality and reliability in the field of corrosion prevention and sealing technology. The success is based on the development of the Petrolatum-Tape which was already developed in 1927 as the first product worldwide for passive corrosion prevention of pipelines. We establish and guarantee the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees are continuously implementing safe and individual solutions in a personal cooperation with the customer.

Description

BUTYLEN System 1 is a robust field coating system for the permanent corrosion prevention of pipelines and pipeline components. BUTYLEN System 1 is a highly stressable systems based on is design of three **BUTYLEN** tapes. The requirements for the stress class **C 30** in accordance with EN 12068 are exceeded.

Standard designation:

- EN 12068 - **C 30**

BUTYLEN System 1 consists of three **BUTYLEN** tapes that have been proven for a long time:

BUTYLEN-E12 is a soft butyl rubber tape, which – as the inner tape – assumes the major corrosion prevention properties of the system. The thick butyl rubber layer of the system permits an outstanding molding of unevenly formed surfaces and an easy manual processing, e.g. on pipelines with small nominal pipe sizes, pipe bends and house connection valves. Due to its self-amalgamation effect in the overlapping area, BUTYLEN-E12 creates an essentially gas and water tight as well as electrically high insulating encasement.

BUTYLEN-090 is used as the middle layer in the coating system. It is a flexible two-ply tape with a polyethylene outside layer and a butyl rubber coating positioned on the inside. The applied winding tension presses the inner tape solidly to the component surface and supports the self-amalgamation of the inner tape.

BUTYLEN-R20 HT is a robust two-ply tape. The solid polyethylene outside layer protects the encasement against mechanical stresses.

All three **BUTYLEN** tapes can be processed efficiently with the **DEKOMAT®** wrapping devices.

Typical product properties

Property	Unit	BUTYLEN-E12 Typical value	BUTYLEN-090 Typical value	BUTYLEN-R20 HT Typical value	Test method
Carrier film color	-		yellow	white, black, or blue	-
Butyl adhesive color inside	-	black	black	black	-
Butyl adhesive color outside	-	black	-	-	-
Tape thickness	mm	≥1.2	≥0.4	≥0.5	ISO 4591 ASTM D1000
Carrier film thickness app.	mm	≥0.025	≥0.22	≥0.3	
Inside adhesive layer thickness app.	mm	≥0.73	≥0.18	≥0.2	
Outside adhesive layer thickness app.	mm	≥0.45	-	-	
Elongation at break	%	-	≥400	≥500	DIN 30672
Tape strength +23°C (+73°F)	N/cm	-	≥35	≥65	EN 12068
Dielectric strength	kV/mm	-	-	≥50	ASTM D149

Property	Unit	BUTYLEN System 1 Typical value	Required value	Test method
System design	Primer	BUTYLEN-HT Primer	-	-
	Inner tape	BUTYLEN-E12, 2 layers		
	Tensioning tape	BUTYLEN-090, 2 layers		
	Outer tape	BUTYLEN-R20 HT, 2 layers		
Total thickness	mm	≥4.2	-	-
Specific electrical insulation resistance	Ohm m ²	≥10 ¹⁰	≥10 ⁸	EN 12068
Peel strength metal/primer/tape	N/cm	≥15	≥10	EN 12068 ASTM D1000
Peel strength layer to layer	E12 / E12	≥30	≥15	EN 12068
	E12 / 090	≥20	≥15	
	090 / 090	≥2	≥2	
	R20 HT / R20 HT	≥3	≥2	
Indentation resistance (residual layer thickness) (stamp load 10MPa)	mm	>0.8	≥0.6	EN 12068
Impact resistance	J	>15	≥15	EN 12068
Cathodic disbondment (radius)	mm	<8	<20	EN 12068
Lap shear strength on steel	N/cm ²	>15	≥5	EN 12068

BUTYLEN tapes can be easily applied manually. The processing with the original **DEKOMAT®** wrapping devices is even more efficient. For **BUTYLEN** tapes with widths of > 50 mm, we recommend the use of the **DEKOMAT®** wrapping device to guarantee an excellent processing quality.

Ordering information and packaging

	Core diameter (mm)	Tape length (m)	Width (mm)	Tape area (m ²)	Content per box			
					Number of rolls	Total tape area (m ²)	Total tape length (m)	App. weight (kg)
BUTYLEN-E12	41	10	50	0.5	12	6.0	120	10
			75	0.75	12	9.0	120	15
			100	1.0	6	6.0	60	10
BUTYLEN-090	41	15	50	0.75	12	9.0	180	6.5
			75	1.125	12	13.5	180	10.0
			100	1.5	6	9.0	90	6.5
BUTYLEN-R20 HT	41	15	30	0.45	18	8.1	270	5.0
			50	0.75	12	9.0	180	5.5
			75	1.125	12	13.5	180	8.0
			100	1.5	6	9.0	90	5.5
		30	50	1.5	12	18	360	11.0
			75	2.25	12	27	360	17.0
			100	3.0	6	18	180	11.0
			150	4.5	6	27	180	17.0

Additional lengths and widths are available on request.

Storage

When stored in its original, unopened packaging, **BUTYLEN-E12/-090/-R20 HT** can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +50°C (+122°F)

Store in a dry location and do not rest anything against the front of the product.

 **SPECIALIZED**
COATING SYSTEMS

Specialized Coating Systems (Pty) Ltd

2 Jones Rd, Bartlett AH, Boksburg,
Gauteng, South Africa
Tel: 086 137 2468 | Email: sales@speccoats.co.za
www.speccoats.co.za

DEKOTEC GmbH

Felderstrasse 24 | 51371 Leverkusen | Germany
Phone: +49 214 2602-0 | info@dekotec.com
www.dekotec.com

Our product information, application recommendations and other printed publications provide advice to the best of our knowledge and indicate our level of knowledge at the time of printing. The content is not legally binding. Therefore, no liability is assumed for incorrect and missing advice. The applicator is obliged to check the suitability and possibility of application for the intended purpose. Unless otherwise specified, all of the brands named are trademarks, at least registered in Germany, which are protected by law.

Only our general terms and conditions of sale, which you will find at www.dekotec.com, apply. This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation, the German text of the respective German product information, shall be decisive. The legal relationship shall be governed by German law.